Commercial Grade Passive Infrared movement detector with 15m detection range. The perfect choice for residential to commercial applications in standard environments.

IR Ready, these detectors are factory fitted with an End-of-line (EOL) resistor module that is specific to Inner Range security controllers which dramatically speeds up installation time by reducing the complexity of the installation. This module is easily removed so these high quality detectors are compatible with any brand of security alarm system. High quality, highly reliable, IR Ready and easy to install, these Commercial Grade Intrusion Detectors will suit any indoor application from residential to highly sensitive commercial applications.




Features


- Customisable field of view select a wide or narrow detection area by rotating the lens within the case.
- Easily Viewable LED Color LED color is green and viewable from distance.
- Human-Catch Element designed to create proper detection areas and optimize detection sensitivity.
- Refined Spherical Lens -provides a precise focal length to each of the multiple lens segments which enables precise detection without distortion.
- SMDA By analysing detection patterns and environmental information, SMDA improves immunity against various noise factors such as climate changes.
- 180 Degree Cover Lock The front cover can be opened and closed by turning the captive screw lock 180 degrees with a flat head screwdriver.



Dimensions - mm (inch)



Detection Area

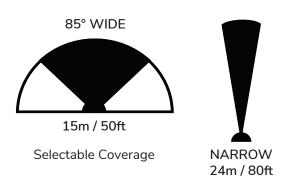

Basic Features

HIGH DETECTION PERFORMANCE



A new bespoke pyroelectric infrared sensor has been specifically designed to create human-size detection areas and optimise detection sensitivity. For industry leading performance.

SMDA LOGIC



Professional sensors have a unique algorithm(SMDA) which can learn from the environment. The SMDA algorithm can differentiate between common causes of nuisance alarms, such as shadows and bright lights, to focus the detection on genuine intrusions.

180 DEGREE COVER LOCK




The front cover can be opened and closed by turning the captive screw lock 180 degrees with a flat head screwdriver.

CONFIGURABLE LENS



Select a wide or narrow area with one lens, simply by turning the lens upside down.

REFINED SPHERICAL LENS



Provides a precise focal length to each of the multiple lens segments which enables precise detection without distortion.


EASILY VIEWABLE



LED colour is green and easily viewable from a distance.

Specific Features

PEU SOCKET



The IR Ready End-Of-Line resistor module is factory fitted and configured with the EOL's to suit the Inner Range security controllers saving significant time and money onsite.

Specifications

IR-D-P3E ECH COMMERCIAL TRI-TECH		
2.0 to 3.0 m (6'7" to 9'8")		
vave Passive infrared & Microwave		
Wide: 15 m (50 ft.) 85° Narrow: 24 m (80 ft.) 5° (No MW detection at "Narrow" setting)		
Approx. 60 s (LED blinks)		
Multiple: Warm-up / Green:Alarm and Masking detection Yellow: Self test error / Red:Low voltage		
9.5 to 16 V DC		
DC 16 mA (normal) 21 mA (max.) at 12 V DC		
N.C. 24 V DC 0.1 A max. (Resistive load)		
sistive load)		
C 0.1 A max. (Resistive load) (Open when the cover is removed)		
✓		
-20°C to +45°C (-4°F to +113°F)		
Digital (SMDA)		
95% RH max.		
') H: 159.1 mm x W: 62.2 mm x D: 55.7 mm (H: 5.09" x W: 2.42" x D: 2.00")		
200 g (7.05 oz)		

- Specifications and designs are subject to change without prior notice.
- These units are designed to detect an intruder and activate an alarm control panel. Being only a part of a complete system, we cannot accept responsibility for any damages or other consequences resulting from an intrusion.
- Tri models (IR-D-P3E) is certified to NF&A2P when operation temperatures are -10°C to +55°C(14°F to +131°F).










Wiring Diagrams


DETECTOR WIRING GUIDE

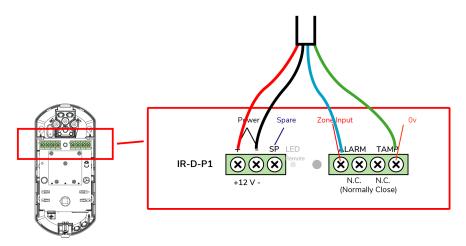

CONTROLLER / ZONE EXPANDER WIRING GUIDE







CONTROLLER PROGRAMMING

The Inception Security Controller, the Integriti Security Controller and the Zone Expansion Modules are pre configured to have their default EOL match the IR Ready range of detectors.