

LPAR480

ENVIRONMENTAL HOUSING

OPTIONS

The HDWMB3 and HDMPT2 wall bracket and manual pan tilt are the only standard mounting hardware available for the housing.

APPLICATIONS

Mounted off poles, building walls. Used for high vandal areas and commonly popular with Time Lapse photograph.

SPECIFICATIONS

CONSTRUCTION	1.6mm zinc anneal
FINISH	Moss Vale Sands polyester powder coat
LENS	4.8mm arris edged glass
CABLE ENTRY	2 x 20mm PVC cable compression glands and 2 blanking grommets.
ACCESS	2 x Southco stainless steel rotary clasps at the rear of the lid.
ELECTRICAL	Optional heater thermostat 24 VAC 50Hz 11watts. Fan 24VAC 50Hz 3.2 watts
MAX CAMERA SIZE	371 mm (L) x 178mm (W) x 140 mm (H). 170 mm height available without the camera sled.
WEIGHT	8.9kg
IP RATING	IP66
INCLUDED	

LPAR400EXSS

ENVIRONMENTAL HOUSING



SPECIFICATIONS


CONSTRUCTION	1.2mm 316 stainless steel
FINISH	Shale Grey polyester powder coat
LENS	4.8mm arris edged glass
CABLE ENTRY	3 x 20mm entries, two in the base and one positioned at the rear of the housing
ACCESS	4 x 6mm stainless steel post cap security screws
ELECTRICAL	Optional heater thermostat 24 VAC 50Hz 11watts. Fan 24VAC 50Hz 3.2 watts
MAX CAMERA SIZE	284mm (L) x 135mm (W) x 120mm (H)
WEIGHT	5.6kg
IP RATING	IP66
INCLUDED	Air Knife, Sunshield and Fan unit

OPTIONS

The HDWMB2 and HDMT2 wall bracket and manual pan tilt are the only standard mounting hardware available for the housing

APPLICATIONS

Mounted of walls, poles or buildings. Used in high dust areas. Perfect for mines, airports and construction site

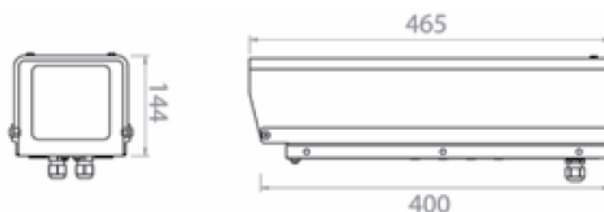

CENTRAL SECURITY DISTRIBUTION

1300 319 499
csd.com.au

VIC: Mulgrave, Tullamarine NSW: Seven Hills, Waterloo ACT: Fyshwick QLD: Loganholme SA: Marlestone WA: Balcatta