




SHIELDED TWISTED PAIR 8723EQ CABLE DATASHEET

Overview

X2 Shielded twisted pair cables are designed and manufactured to meet Australian specifications. Metre marking along the sheath makes it easy and convenient for the installer to identify remaining cable length.

Ordering Information

PART NO:	DESCRIPTION:
X2-CABLE-810	X2 Cable, 4 x 7/030, Belden 8723EQ Screened Cable, 100m, Roll, Grey
X2-CABLE-811	X2 Cable, 4 x 7/030, Belden 8723EQ Screened Cable, 300m, Pull Box, Grey
X2-CABLE-812	X2 Cable, 4 x 7/030, Belden 8723EQ Screened Cable, 500m, Wooden Roll, Grey

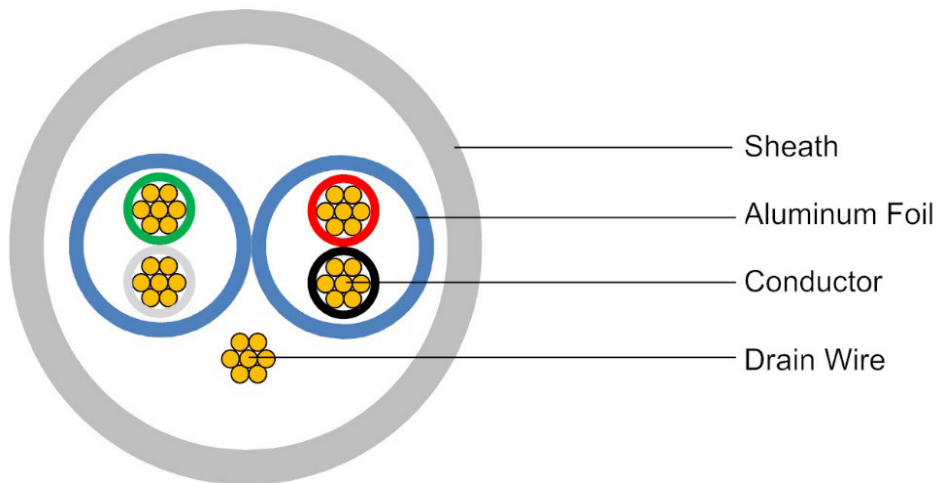

Additional Information

Warranty

1 Year

Specifications

Conductor	Material	TC-Tinned Copper
	Cores	2 Pairs × 2C×7/0.30mm ± 0.005mm
	Conductor Resistance	≤ 4.83Ω / 100m
	Breaking elongation rate	≥ 15%
Insulation	Material	PE
	Nominal I.D	1.20mm
	Resistance	≥ 0.010Ω / km
	Voltage	300V
	Colour	Red, Black, White, Green
	Insulation tension	≥ 16MPa
	Insulation breaking elongation	≥ 200%
Sheath	Material	PVC
	Nominal O.D	4.3mm
	Colour	Grey
	Tension before aging	≥ 10MPa
	Breaking elongation before aging	≥ 125%
	Breaking elongation after aging	≥ 100%
Properties	Temperature	-20°C upto + 75°C
	Lengths	100m, 300m, 500m
	Drain Wire	7/020* TC-Tinned
	Shield	Individual pairs, Aluminium Foil
Standards	AS/CA S008:2010	Yes
	AS 1660.5.6 Flammability	Yes
	RoHS compliant	Yes

*Features and specifications are subject to change without notice. E&OE.