

AXIS T8061 Ethernet Surge Protector


Protect PoE device from lightning

Protect your Ethernet network devices, such as IP cameras, switches or midspans, from lightning entering through the Ethernet cable with AXIS T8061 Ethernet Surge Protector. It can be easily installed on a wall or a pole, and thanks to its weatherproof enclosure, it can withstand water, dust and the ingress of water. AXIS T8061 Ethernet Surge Protector can be installed before the Ethernet cable enters the building to protect indoor network devices, or immediately adjacent to outdoor Axis network cameras.

- > Supports data rates of up to 1 Gbps
- > Protects up to 10 kV surge
- > All eight lines protected, including PoE
- > Outdoor ready
- > Flexible installation wall or pole mounted

Indoor

Outdoor

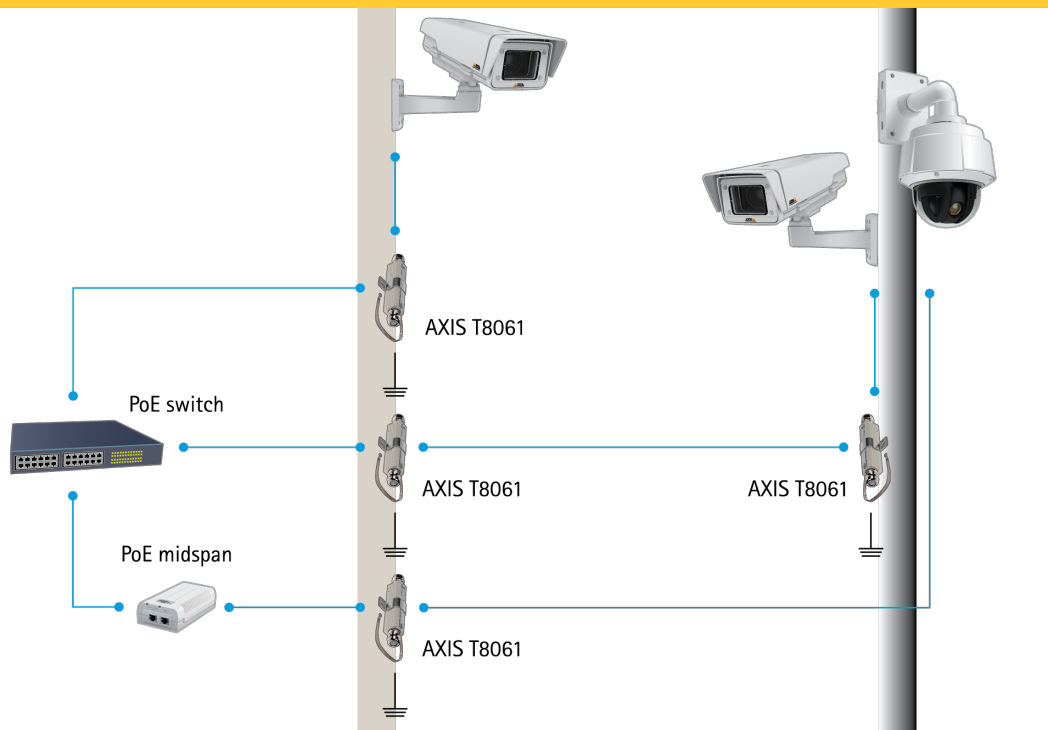

AXIS T8061 Ethernet Surge Protector

General	
Casing	Weatherproof metal enclosure
Dimensions	30 x 30 x 190 mm 1.18 x 1.18 x 7.48 in
Weight	270 g 0.6 lb
Environment	Indoor Outdoor
Mounting option	Wall Pole (requires straps or similar)
Connectors	RJ45 10BASE-T/100BASE-TX/1000BASE-T PoE
Power	Surge Handling Capability: 10 kV, 5 kA to ground in 8/20 μ s 800 V, 100 A PoE Input Power: 95 W (max) Input Current: 2 A (max)
Operating conditions	-40 °C to 85 °C -40 °F to 185 °F
	0 to 95% (non-condensing)
Approvals	IEC 60529 IP66 NEMA 250 Type 4X IEC 61643-21 UL 497B GR1089 ITU-T K.45 EN 50581 REACH WEEE
Optional accessories	For more accessories, see www.axis.com
Warranty	Axis 3-year warranty, see www.axis.com/warranty

Environmental responsibility:
www.axis.com/environmental-responsibility



CENTRAL SECURITY DISTRIBUTION

An Anixter Company

1300 319 499
csd.com.au