

AXIS T83 Microphones

High-performance all-around microphones.



- > Professional audio surveillance
- > Outstanding dynamic range and low noise
- > Omnidirectional
- > Discreet and compact microphones

Compact and discreet microphones with high-performance in all scenarios. AXIS T83 Microphones are compatible with Axis network video products offering great detail and resolution.

The microphones are omnidirectional condenser microphones and therefore do not need to be aimed directly at the sound source. AXIS T83 design allows for discreet installation, and they can be used for covert audio detection or as a complement to indoor video surveillance.

AXIS T8351 with a 3.5 mm connector and AXIS T8353A with a 3.5 mm adaptor are compatible with Axis M-, P- and Q-line network video products supporting a 3.5 mm jack for microphone input.

AXIS T8353B Microphone Phantom Power is an omnidirectional microphone with an XLR contact and a pigtail

adaptor. Phantom power voltages of 12–48 V DC is supported. It is compatible with phantom power devices, such as AXIS P8221 Network I/O Audio Module.

With a broad range of mounting accessories, AXIS T8351 can be easily installed on walls or ceilings. Thanks to its small size is also suitable for covert audio surveillance. The 5 m (197 in) long cable allows for an installation closer to the sound source. Thanks to the IP66 rating, AXIS T8351 can be installed in semi-outdoor environments, such as under ceilings at airports and porches in subways or schools.


Technical Specifications – AXIS T83 Microphones

Models	AXIS T8351 Microphone 3.5 mm AXIS T8353A Microphone 3.5 mm AXIS T8353B Microphone Phantom Power	Environment	AXIS T8351: Indoor, Semi-outdoor AXIS T8353A/T8353B: Indoor
Audio		Operating conditions	AXIS T8351: -20 °C to 60 °C (-4 °F to 140 °F) Humidity up to 75% RH (non-condensing) AXIS T8353A/T8353B: -25 °C to 45 °C (-13 °F to 113 °F) Humidity up to 90% RH (non-condensing)
Supported cameras	AXIS T8351/T8353A: All Axis M-, P- and Q-line network video products supporting a 3.5 mm jack for microphone input AXIS T8353B: AXIS P8221 Network I/O Audio Module	Storage conditions	AXIS T8351: -20 °C to 60 °C (-4 °F to 140 °F) AXIS T8353A/T8353B: -25 °C to 70 °C (-13 °F to 158 °F)
Frequency range	20 Hz to 20 kHz (see graph)	Dimensions	AXIS T8351: Microphone (LxHxW): 28 x 20 x 20 mm (1.1 x 0.8 x 0.8 in) Cable (LxØ): 5 m x 3 mm (197 x 0.1 in) 3.5 mm plug (Ø): 6 mm (0.2 in) AXIS T8353A/T8353B: Microphone (LxØ): 5.4 x 12.7 mm (0.2 x 0.5 in) Cable (LxØ): 1.8 m x 1.6 mm (71 x 0.06 in) 3.5 mm plug (Ø): 7.9 mm (0.3 in) XLR adaptor (LxØ): 20.4 mm x 70 mm (0.8 x 2.8 in)
Sensitivity	AXIS T8351: -40 dB (relative: 1 V/Pa) AXIS T8353A/T8353B: -44 dB (relative: 1 V/Pa)	Weight	AXIS T8351: 70 g (0.15 oz) AXIS T8353A: 14 g (0.5 oz) AXIS T8353B: 80 g (2.8 oz)
Max SPL, peak before clipping	AXIS T8351: 120 dB AXIS T8353A/T8353B: 138 dB	Included accessories	AXIS T8351: White Cover, Mount Bracket 0–4 mm, Mount Bracket, Doublesided tape 20x10 mm, Cable Holder, Cable Gasket M20 3 mm, Cable Gasket M16 3 mm, Installation Guide AXIS T8353B: XLR adaptor, Pigtail
SNR	AXIS T8351: 64 dB A-weighted (relative: 1 kHz @ 1 Pa, 94 dB SPL) AXIS T8353A/T8353B: 68 dB A-weighted (relative: 1 kHz @ 1 Pa, 94 dB SPL)	Optional accessories	AXIS Audio Extension Cable A 5 m (197 in) AXIS T8353A/T8353B: AXIS T8353 Mount
Directionality	Omnidirectional	Warranty	Axis 3-year warranty, see www.axis.com/warranty
Power			
Power requirements	AXIS T8351: 3–5 V DC ^a AXIS T8353A: 3–5 V DC ^a AXIS T8353B: 12–48 V DC ^a		
Connectors	AXIS T8351/T8353A: 3.5 mm phono plug AXIS T8353B: XLR male and pigtail		
General			
Casing	AXIS T8351: Color: Light gray NCS S 1002-B AXIS T8353A/T8353B: Color: NCS S 9002-B		
Compliance	RoHS, REACH, IEC/EN 60950-1, EN 55103-1, EN 55103-2		
Approvals	AXIS T8351: IP66		

a. Power is provided by the Axis network video product

More information is available at www.axis.com

Frequency range

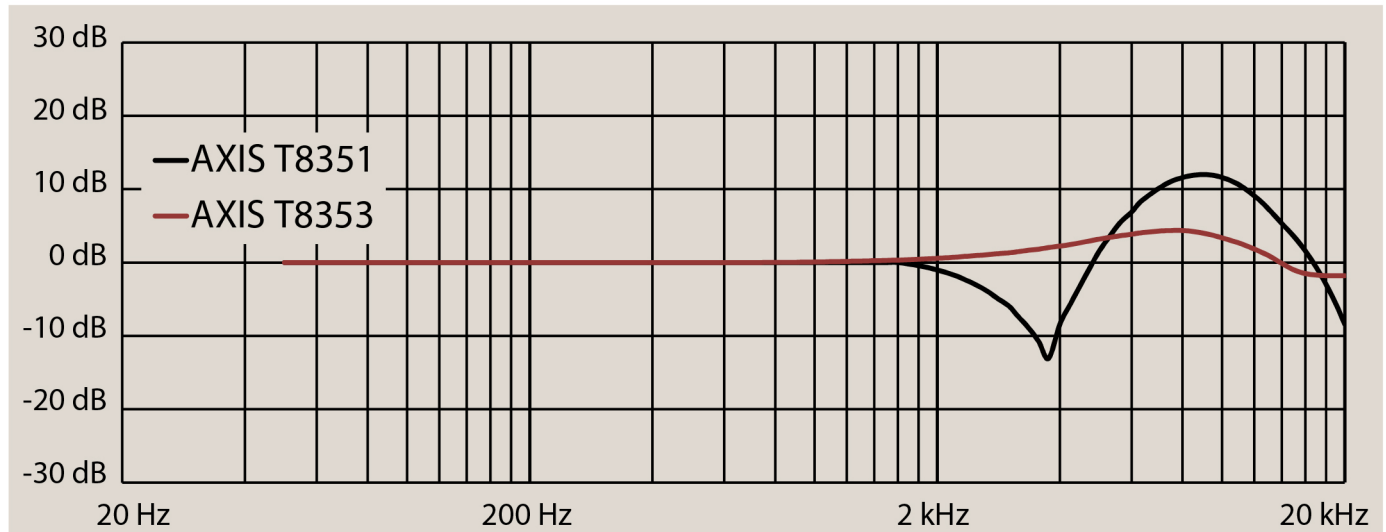

CENTRAL SECURITY DISTRIBUTION

1300 319 499
csd.com.au

VIC: Mulgrave, Tullamarine NSW: Seven Hills, Waterloo ACT: Fyshwick QLD: Loganholme SA: Marlestone WA: Balcatta