



# CAT6 Black Solid Gel Cable Roll


305m CAT6 black solid gel cable roll.  
Below ground installation.

## PRODUCT SPECIFICATIONS

Category	U/UTP-ZST CAT6-4P-PE			
Test Standard	ISO/IEC11801, TIA-568C.2			
Conductor	Material	SOLID-Bare Copper		
	Nom. O.D. (mm)	0.565	Up	+0.005
Insulation	Material	HDPE		
	Diameter	1.09±0.03mm		
Colour	A.Blue, White-Blue	B.Orange, White-Orange		
	C.Green, White-Green	D.Brown, White-Brown		
Sheath	Thickness	0.60±0.05 mm		
	External O.D.	6.8±0.8 mm		
	Surface	Clean, Frap, Satiation		
	Material	LDPE		
Surface Printing	Colour	Black		
	Letter Height	3.0±0.3mm		
	Print Error & Space	≤±0.5% 1m		
Sheath Physical Properties	Before Aging Tensile Strength (Mpa) ≥10.0			
	Elongation(%) ≥350			
	Aging Period (°C×hrs) 100°C×24h×10d			
Electrical Characteristics (20°C)	After Aging Elongation(%) ≥300			
	Cold bend(-20±2°C×4h) 8×Cable O.D. No visible cracks			
	1.0-250.0MHz, Characteristic impedance (Ω) 100±15			
	1.0-250.0MHz, Delay Shew 20°C (ns/100m) ≤45			
	DC Resistance 20°C (Ω/100m) max 9.38			
	DC Conductor Resistance Unbalance (%)max 5.0			

# CAT6 Black Solid Gel Cable Roll

NCC6SLDGEL

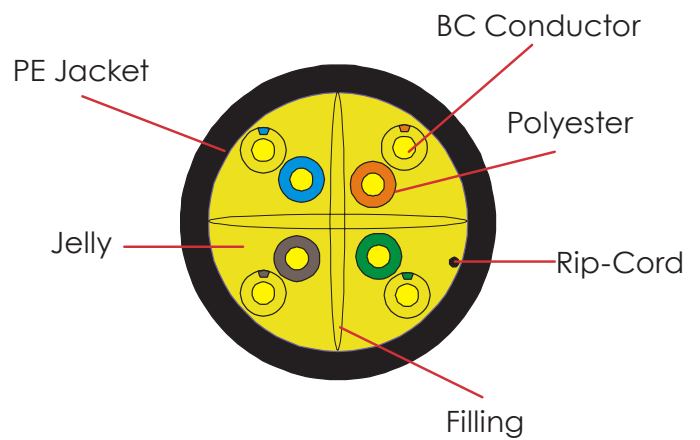

## FLUKE Technical Performance

Frequency (MHz)	RL ≥dB	ATT ≤dB	NEXT ≥dB	DELAY ≤ns
1	19.1	3.0	65.0	
4.0	21.0	3.5	64.1	
8.0	21.0	5.0	59.4	
10.0	21.0	5.5	57.8	
16.0	20.0	7.0	54.6	498
20.0	19.5	7.9	53.1	
25.0	19.0	8.9	51.5	
31.25	18.5	10.0	50.0	
62.5	16.0	14.4	45.1	
100	14.0	18.6	41.8	
200	11.0	27.4	36.9	
250	10.0	31.1	35.3	
Frequency (MHz)	PSNEXT ≥dB	ELFEXT ≥dB	PSELFEXT ≥dB	
1	62.0	64.2	61.2	
4	61.8	52.1	49.1	
8	57.0	46.1	43.1	
10	55.5	44.2	41.2	
16	52.2	40.1	37.1	
20	50.7	38.2	35.2	
25	49.1	36.2	33.2	
31.25	47.5	34.3	31.3	
62.5	42.7	28.3	25.3	
100	39.3	18.2	15.2	
200	34.3	18.2	15.2	
250	32.7	16.2	13.2	



**CENTRAL SECURITY DISTRIBUTION**

An Anixter Company

1300 319 499

csd.com.au

VIC: Mulgrave, Tullamarine NSW: Seven Hills, Waterloo ACT: Fyshwick QLD: Loganholme SA: Marlestone WA: Balcatta