

## DS-D6032FL-B Indoor Wall-Mounted Digital Signage

The digital signage is used to broadcast information, release news, advertise products, etc., which is widely applicable to industry of entertainment, finance, traffic, etc.



### Feature and Function


- **Metallic Appearance**  
Features in thin body and ultra-narrow boarder with integrative quadrilateral design, and supports horizontal and vertical installation.
- **Exquisite Image**  
Industrial A+ panel, auto-coloring and image-enhancing engine.
- **Variable Materials**  
Supports static and dynamic materials, including the pictures, audio, video, scrolling subtitle, PDF, webpages, live video, number calling, pop-up pictures, etc.
- **Flexible Program Schedule**
  - Supports free schedule and district display of multiple materials.
  - Supports variable display modes: display by day, display by week, custom display, etc.
- **Centralized Management**
  - Remotely controls and manages one screen or more screens, such as timed startup/shutdown, quick startup/shutdown, brightness/volume timed adjustment, and screenshot preview.
  - Remotely releases programs and updates local (USB) programs.
- **Organization Permission**
  - 5-level organization is available for managing materials, programs, terminals, and users.
  - Supports creating custom users, and allocating permission for users according to user level.
- **Multiple Security Safeguards**
  - 3-level check of materials, programs and schedules to prevent mistake release.
  - Encryption of data in storage and transmission to prevent data tampering.
  - Screensaver to secure the security of broadcast contents.



## Specification

| Model           |   | DS-D6032FL-B   |
|-----------------|---|--|
| Display         | Screen size   | 31.51 inch   |
|                 | Active display area   | 698.4(H) × 392.85(V) mm (27.50 × 15.47 inch)   |
|                 | Backlight   | Direct illumination-type LED backlight   |
|                 | Pixel pitch   | 0.12125 (H) × 0.36375 (V) mm   |
|                 | Resolution  | 1920 × 1080@60 Hz  |
|                 | Brightness  | 350 cd/m <sup>2</sup>  |
|                 | Viewing angle   | Horizontal: 178°, vertical: 178°   |
|                 | Color depth   | 8 bit  |
|                 | Contrast ratio  | 1200: 1  |
|                 | Response time   | 8 ms   |
|                 | Refresh rate  | 60 Hz  |
|                 | Color gamut   | 75% NTSC   |
|                 | Reliability   | 7 × 24 h   |
| Interface       | Video & audio input   | 1 × AUDIO IN   |
|                 | Video & audio output  | 1 × AUDIO OUT<br>2 × built-in speaker, 8 Ω 5 W   |
|                 | Network interface   | 1 × LAN, Wi-Fi 2.4 G   |
|                 | Data transmission interface   | 2 × USB 2.0 interface, 1 × TF Card<br>Note: The USB interface only supports for low power equipment, such as the keyboard or mouse.  |
| Built-in system | Processor   | 4-core Cortex-A17, main screen 1.8 GHz   |
|                 | Memory  | 2 GB   |
|                 | Built-in storage  | 8 GB EMMC, TF 32 GB, Max. 128 GB   |
|                 | Operation system  | Android 6.0.1  |
| General         | Material type   | DAT, MPG, VOB, TS, AVI, MKV, MP4, MOV, 3GP, TS, FLV, WEBM, ASF, MP1, MP2, MP3, WMA, WAV, OGG, OGA, FLAC, ACC, M4A, XMF, MXMF, RTTTL, RTX, OTA, IMY, JPG, JPEG, BMP, GIF, PNG |
|                 | Power supply  | 100 to 240 VAC, 50/60 ± 3 Hz   |
|                 | Power consumption   | ≤ 60 W   |
|                 | Standby consumption   | ≤ 10 W   |
|                 | Working temperature   | 0 °C to 40 °C (32 °F to 104 °F)  |
|                 | Working humidity  | 10 % to 80 % RH  |
|                 | Storage temperature   | -20 °C to 60 °C (-4 °F to 140 °F)  |
|                 | Storage humidity  | 10 % to 80 % RH  |
|                 | Product dimensions  | 748.31(W) × 447.11(H) × 55.9(D) mm (without wall-mounted backboard)<br>(29.46 × 17.60 × 2.20 inch)   |
|                 |   | 748.31(W) × 447.11(H) × 71.4(D) mm (with wall-mounted backboard)<br>(29.46 × 17.60 × 2.81 inch)  |
|                 | Package dimensions  | 904(W) × 643(H) × 210(D) mm (35.59 × 25.31 × 8.27 inch)  |
|                 | Gross weight  | 16.1 kg (35.49 lb.)  |
|                 | Net weight  | 15.1 kg (33.29 lb.)  |
| Accessory       | Power cord, Remote control, Battery × 2, Expansion bolt, Installation guide, LOGO |  |

## Physical Interface

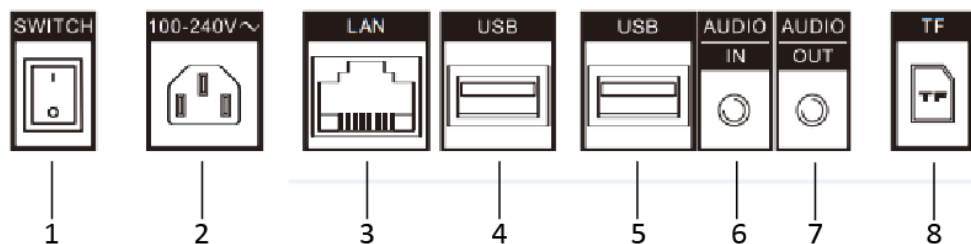


| No. | Interface | Description           | No. | Interface | Description       |
|-----|-----------|-----------------------|-----|-----------|-------------------|
| 1   | SWITCH    | Power switch          | 2   | 100-240V~ | Power supply      |
| 3   | LAN       | LAN network interface | 4   | USB       | USB 2.0 interface |
| 5   | USB       | USB 2.0 interface     | 6   | AUDIO IN  | Audio input       |
| 7   | AUDIO OUT | Audio output          | 8   | TF        | TF card slot      |


## Available Model

DS-D6032FL-B

## Dimension (unit: mm)

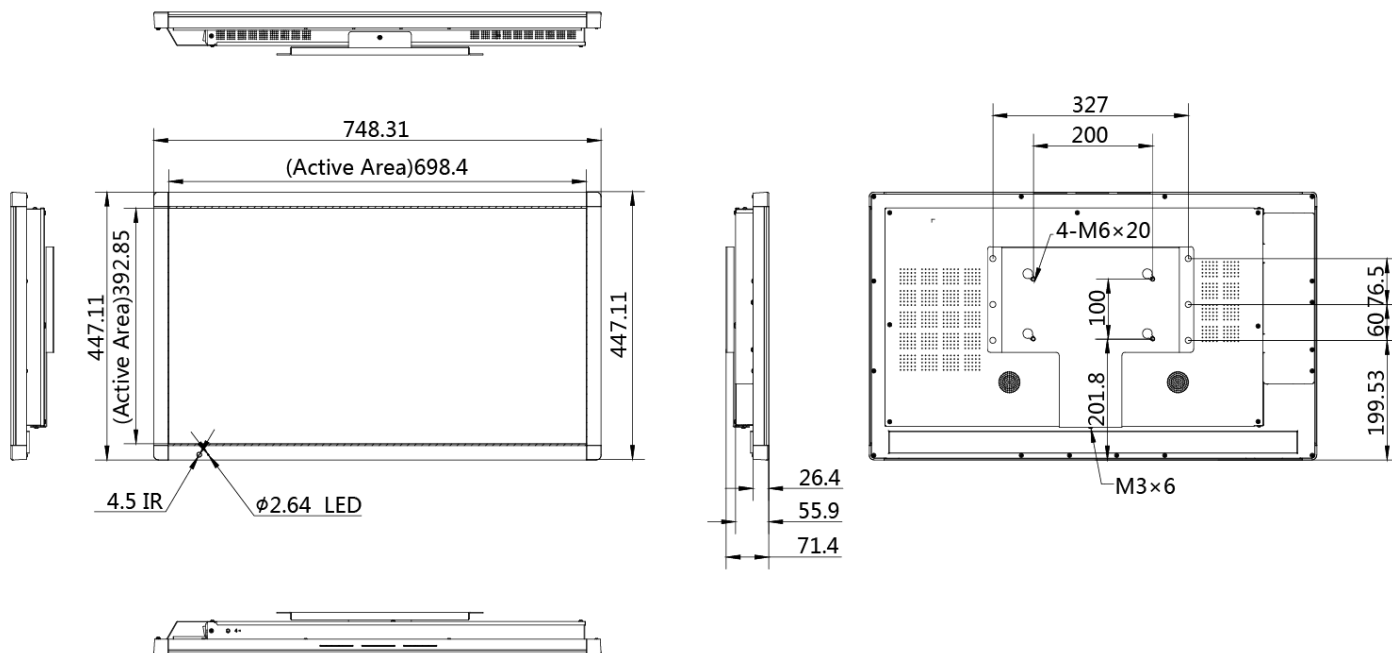

## Typical Application

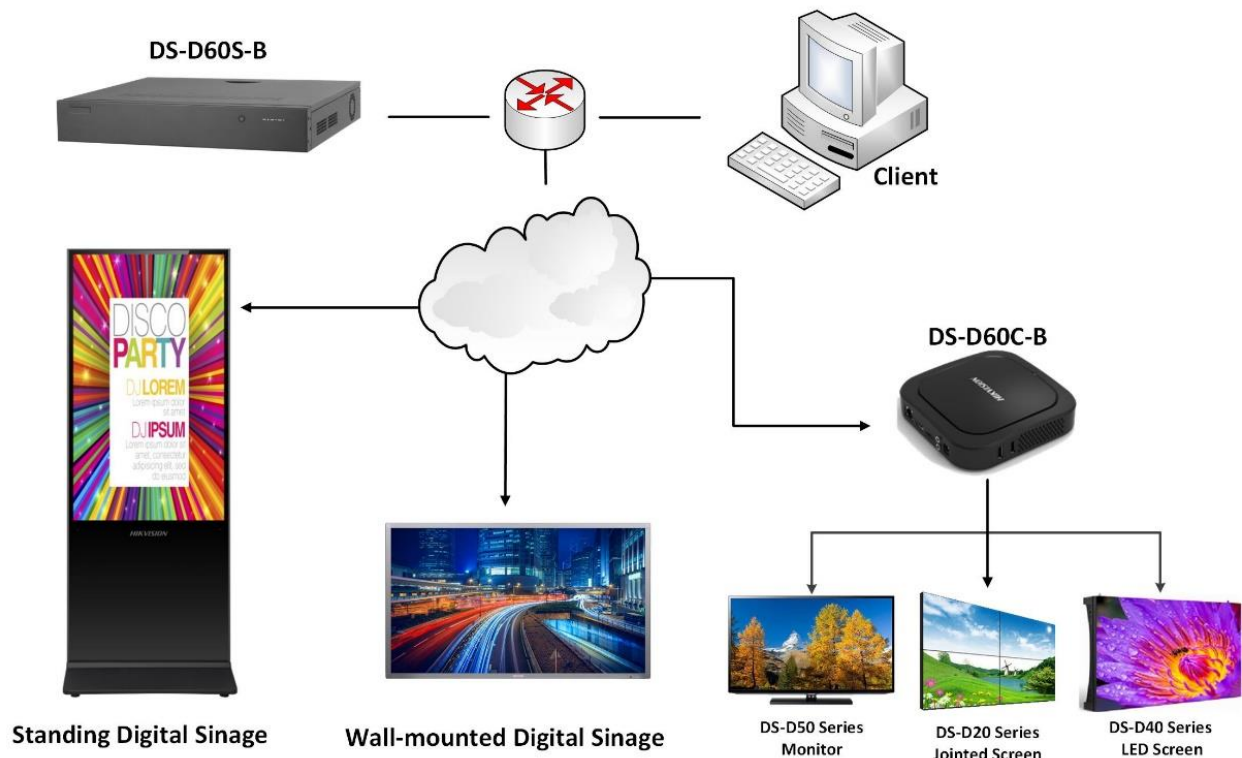

**CENTRAL SECURITY DISTRIBUTION**

An Anixter Company

1300 319 499

[csd.com.au](http://csd.com.au)

VIC: Mulgrave, Tullamarine NSW: Seven Hills, Waterloo ACT: Fyshwick QLD: Loganholme SA: Dudley Park WA: Balcatta