

DS-D6043FL-B/S

Indoor Standing Digital Signage

Standing digital signage is used to broadcast information, release news, advertise products, etc., which is widely applicable to industry of entertainment, finance, traffic, etc.



Feature and Function

- **Metallic Appearance**

Light weight body with integrative design. The front high-transmittance tempered glass provides reliable protection.

- **Exquisite Image**

Industrial A+ interface, auto-coloring and image-enhancing engine.

- **Variable Materials**

Static and dynamic materials, including pictures, audio, video, scrolling subtitle, PDF, webpage, live video, number calling, pop-up pictures, etc.

- **Flexible Program Schedule**

- Free schedule and district display of multiple materials.
- Multiple play modes with customization support.

- **Centralized Management**

- Remotely control and manage one or more screens, such as timed startup/shutdown, quick startup/shutdown, brightness/volume timed adjustment, and screenshot preview.
- Remote program release and local (USB) program update.

- **Organization Permission**

- 5-level organization available for managing materials, programs, terminals, and users.
- Create custom user with precise permission assignment. Multiple permission templates available.

- **Multiple Security Safeguards**


- 3-level check of materials, programs, and schedules to prevent mistake release. Screensaver password to protect displaying.
- Encryption of data storage and transmission to avoid data tampering.
- With no default password, users can activate and set initial password to guarantee the password safety.



Specification

Model		DS-D6043FL-B/S	
Display	Screen size	42.5 inch	
	Active display area	529.25(H) × 940.90(V) mm (20.84 × 37.04 inch)	
	Backlight	LED backlight	
	Pixel pitch	0.163 × 0.490 mm	
	Resolution	1920 × 1080@60 Hz	
	Brightness	450 cd/m ²	
	Viewing angle	Horizontal: 178°, Vertical: 178°	
	Color depth	8 bit	
	Contrast ratio	1200 : 1	
	Response time	8 ms	
	Refresh rate	60 Hz	
	Color gamut	72% NTSC	
Built-in system	Operating system	Android 6.0.1	
	Processor	Cortex-A17, 4-core, 1.8 GHz	
	Memory	2 GB	
	Built-in storage	8 GB EMMC, TF 32 GB, Max. 128 GB	
Interface	Video & audio output	1 × AUDIO OUT 2 × built-in speaker, 8 Ω 5 W	
	Network interface	1 × LAN, Wi-Fi 2.4 G	
	Data transmission interface	2 × USB, 1 × TF Card Note: The USB interface only supports for low power equipment, such as the keyboard or mouse.	
General	Material type	DAT, MPG, VOB, TS, AVI, MKV, MP4, MOV, 3GP, TS, FLV, WEBM, ASF, MP1, MP2, MP3, WMA, WAV, OGG, OGA, FLAC, ACC, M4A, XMF, MXMF, RTTTL, RTX, OTA, IMY, JPG, JPEG, BMP, GIF, PNG	
	Power supply	100 to 240 VAC, 50/60 Hz	
	Power consumption	≤ 150 W	
	Standby consumption	≤ 10 W	
	Working temperature	0 °C to 40 °C (32 °F to 104 °F)	
	Working humidity	10% to 90% RH	
	Storage temperature	-20 °C to 60 °C (-4 °F to 104 °F)	
	Storage humidity	10% to 80% RH	
	Product dimensions		589.74(W) × 1717(H) × 55(D) mm (23.22 × 67.60 × 2.17 inch) (without base)
			589.74(W) × 1800(H) × 450(D) mm (23.22 × 70.87 × 17.71 inch) (with base)
	Package dimensions		765 (W) × 1935(H) × 303(D) mm (30.12 × 76.18 × 11.93 inch)
	Net weight		48.46 kg (106.84 lb.)
Gross weight		63.46 kg (139.91 lb.)	
Accessory		Screen, Base, Key, Screw kit, Installation manual	

Physical Interface

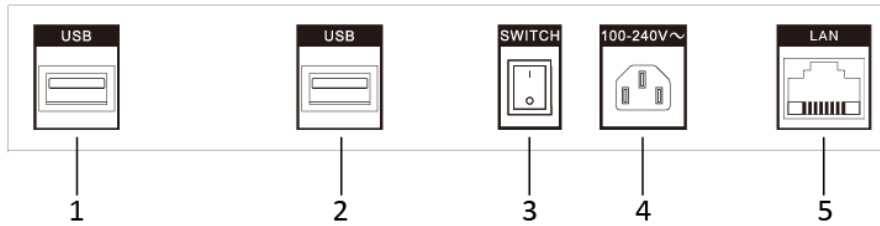


No.	Interface	Description	No.	Interface	Description
1	USB	USB 2.0 interface	2	USB	USB 2.0 interface
3	Switch	Power switch	4	100-240V~	Power interface
5	LAN	Network Interface	---	---	---

Available Model


DS-D6043FL-B/S

Accessory Device


Model	Material Code	Description	Picture
DS-D60S-B	302501753	Information release management server (integration of software and hardware)	

Dimension (unit: mm)

DS-D6043FL-B/S (with base)

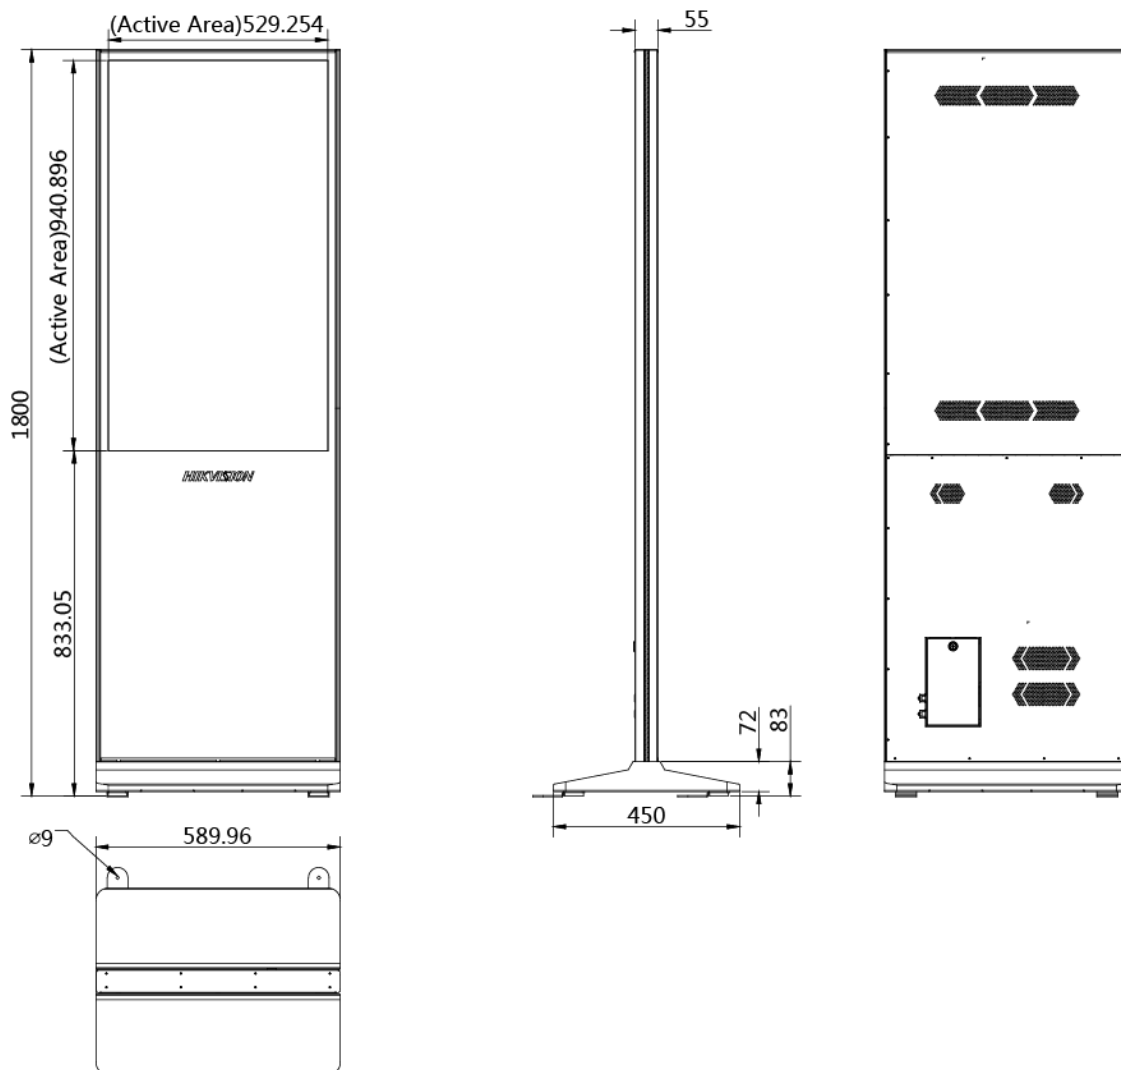

Typical Application

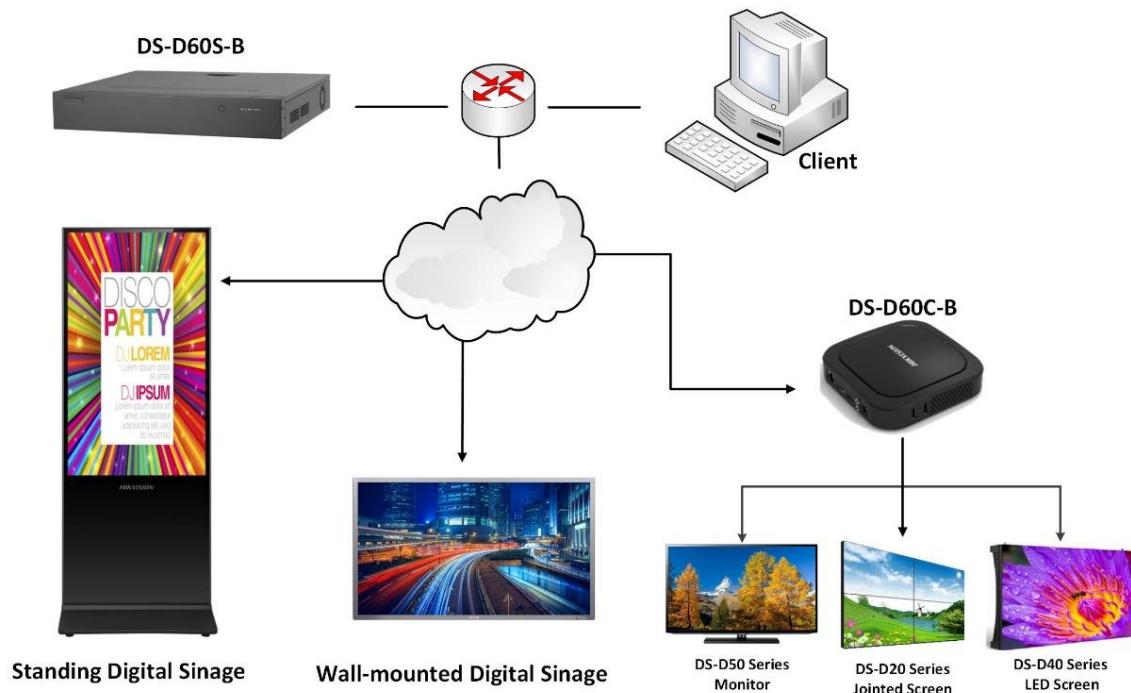

CENTRAL SECURITY DISTRIBUTION

An Anixter Company

1300 319 499

csd.com.au

VIC: Mulgrave, Tullamarine NSW: Seven Hills, Waterloo ACT: Fyshwick QLD: Loganholme SA: Dudley Park WA: Balcatta