DS-KIS101-P/Flush Video Intercom Two-Wire Analog Bundle







Key Feature

- 2-Wire plug & play, easy, cost-efficient
- Receive video call and Unlock via indoor station
- 7-inch TFT screen with 1024*600 resolution
- 2MP HD colorful camera
- View in color, even in darkness
- One-touch calling with nametag
- IP65 water resistant, preventing from water ingress
- IK7 vandal resistant
- 2 lock relays, power supply for one electric lock (Up to 12V 1A)

Specification

Door station				
Supplement light	IR supplement			
Lens	Low Illumination 2 MP HD IR Camera			
FOV	Horizontal: 100°, Vertical: 69°			
WDR	Support			
Resolution	2MP			
Door station				
Audio input	Built-in omnidirectional microphone			
Audio output	Built-in loudspeaker (More than 80 dB within 20 cm)			
Volume	Adjustment with several driver			
adjustment	Adjustment with screwdriver			
Door station				
Alarm input	4			
Two-Wire	1			
TAMPER	1			

Exit button	2					
	2, locking time can be adjusted via DIP					
Lock control	switch (Max. 7 s)					
Door contact	2					
input	_					
Power supply	1, Max. 12 V 1 A					
for lock	1, IVIQA. 12 V 1 A					
Debugging port	1					
Door station						
Button	1					
Installation	Flush mounting					
Protective level	IP65, IK7					
Working	-30 ° C to +60 ° C (-22 ° F to 140 ° F)					
temperature	-50 C to +00 C (-22 F to 140 F)					
Working	10% to 90%					
humidity	10% to 90%					
Dimensions	150 mm $ imes$ 82 mm $ imes$ 23.5 mm (5.91"					
Dimensions	× 3.23" × 0.93")					
Power supply	48 VDC, 0.5 A					
Application	Outdoor					
environment	Cutaco					
Power	≤ 12 W					
consumption						
Door station						
Operation	Embedded analog operation system					
system	Embedded analog operation system					
Indoor station						
Size	7-inch TFT non-touch screen					
Operation	6 touch buttons					
method	o todon buttons					
Туре	Colorful TFT screen					




Resolution	1024 × 600					
Indoor station						
Audio input	Built-in omnidirectional microphone					
Audio output	Built-in loudspeaker (More than 80 dB within 20 cm)					
Audio quality	/					
Volume	Adjustable with touch-button					
Audio						
compression	/					
Rate						
Indoor station						
Two-wire	3					
Indoor station						
Power supply	48 VDC					
Power consumption	≤ 5 W					
Working temperature	-10 ° C to 50 ° C (14 ° F to 122 ° F)					
Working humidity	10% to 90%					
Dimensions (W	187 mm × 137 mm × 25.4 mm (7.36"					
imes H $ imes$ D)	× 5.39" × 1.00")					
Installation	Surface mounting					
Button	6					
Indoor station						
Operation system	Embedded analog operation system					

Ava	.:		_ n	<i>-</i>	-1-1
ΔM_{2}	בוונ	nı	0 I		поі

DS-KIS101-P/Flush


Physical Interface

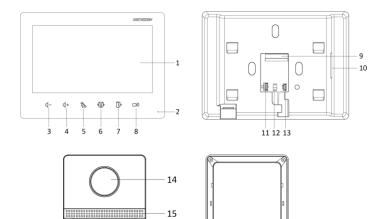

19 16 ₂₀

No.	Description	No.	Description
1	Screen	12	DIP Switch
2	Microphone 13		Debugging Port
3	Volume +	14	Camera
4	Volume -	15	Loudspeaker
5	Receive /Decline	16	Call Button
6	Unlock Door 2	17	Microphone
7	Unlock Door 18		TAMPER
8	Monitor /Switch	19	Terminals
9	Terminals	Terminals 20	
10	Loudspeaker 21		DIP Switch
11	Power Terminal	22	Volume Adjust

Dimension

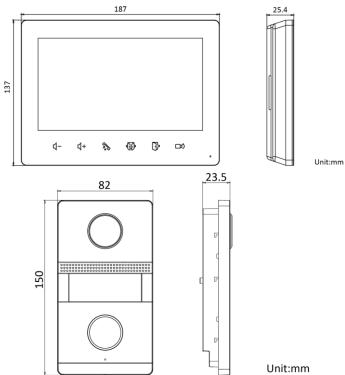



Distributed by

HIKVISION°

Headquarters

No.555 Qianmo Road, Binjiang District, Hangzhou 310051, China T+86-571-8807-5998 overseasbusiness@hikvision.com

Hikvision USA T+1-909-895-0400 sales.usa@hikvision.com

Hikvision Australia T+61-2-8599-4233 salesau@hikvision.com

Hikvision India T +91-22-28469900 sales@pramahikvision.com

Hikvision Canada T+1-866-200-6690 sales.canada@hikvision.com

Hikvision Thailand T+662-275-9949 sales.thailand@hikvision.com Hikvision Europe T +31-23-5542770 sales.eu@hikvision.com

Hikvision Italy T +39-0438-6902 info.it@hikvision.com

Hikvision Brazil T +55 11 3318-0050 Latam.support@hikvision.com

Hikvision Turkey T +90 (216)521 7070- 7074 sales.tr@hikvision.com

Hikvision Malaysia T+601-7652-2413 sales.my@hikvision.com Hikvision UK & Ireland T +01628-902140 sales.uk@hikvision.com

Hikvision South Africa Tel: +27 (10) 0351172 sale.africa@hikvision.com

Hikvision France T +33(0)1-85-330-450 info.fr@hikvision.com

Hikvision Kazakhstan T +7-727-9730667 nikia.panfilov@hikvision.ru

Hikvision Vietnam T +84-974270888 sales.vt@hikvision.com Hikvision UAE T +971-4-4432090 salesme@hikvision.com

Hikvision Singapore T +65-6684-4718 sg@hikvision.com

Hikvision Spain T +34-91-737-16-55 info.es@hikvision.com

Hikvision Tashkent T+99-87-1238-9438 uzb@hikvision.ru

Hikvision Hong Kong T +852-2151-1761 info.hk@hikvision.com Hikvision Russia T +7-495-669-67-99 saleru@hikvision.com

Hikvision Korea T +82-{0}31-731-8817 sales.korea@hikvision.com

Hikvision Poland T +48-22-460-01-50 info.pl@hikvision.com

Hikvision Indonesia T +62-21-2933759 Sales.Indonesia@hikvision.com

Hikvision Colombia sales.colombia@hikvision.com

© Hikvision Digital Technology Co., Ltd. 2020 | Data subject to change without notice |