



Material:

- Enclosure and door: Fibreglass-reinforced unsaturated polyester
- Fire protection corresponding to UL 94 V-0
- Halogen free
- Door: All-round foamed-in PU seal
- Mounting plate: Sheet steel

Surface finish:

- Enclosure and door: Dyed plastic with no after-treatment
- Mounting plate: Zinc-plated

Colour:

- Similar to RAL 7035

Protection Class:

- II at 1000 V AC

Protection category IP to IEC 60 529:

- IP 66

Protection category NEMA:

- NEMA 4X

Supply includes:

- Door hinged on the right, may be swapped to the left
 - Mounting plate
 - Open base for individual cable entry
 - Enclosure with hinged door, of all-round solid construction, 3 mm double-bit lock
 - Twin seal on the top and bottom edges of the door as integral rain protection strip
- Please note the product-specific scope of supply.


Note:

- Interior installation screws are required to secure components inside the enclosure
- Components such as punched sections with mounting flanges may be attached on a 25 mm pitch pattern using the universal bracket

Approvals:

- UL
- cUL

Further approvals can be found

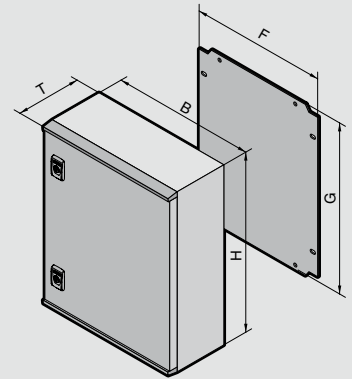

AX Plastic without viewing window

Model No. Standard	Width mm	Height mm	Depth mm	Design
1432000	250	350	150	without viewing window
1434000	300	400	200	without viewing window
1444000	400	400	200	without viewing window
1446000	400	600	200	without viewing window
1453000	500	500	300	without viewing window
1466000	600	600	200	without viewing window
1468000	600	800	300	without viewing window
1480000	800	1,000	300	without viewing window

Accessories

Model No. Standard	Description	Suitable for Width	Suitable for Height	To Fit Enclosure Type
1485744	Inner Door	400	400	AX plastic
1485766	Inner Door	600	600	AX plastic
1485768	Inner Door	600	800	AX plastic

Model No.	Description	Packs Of
1485400	Wallmount Bracket	4
2584100	Pole clamp	2
1485100	Door stay	2

Model No.	Description	Packs Of
1485600	Mini Comfort Handle	1
1485200	Universal bracket	4
1485300	Pan head screw, self tapping	50

Plastic Enclosures AX



Material:

- Enclosure and door: Fibreglass-reinforced unsaturated polyester
- Fire protection corresponding to UL 94 V-0
- Halogen free
- Door: All-round foamed-in PU seal
- Mounting plate: Sheet steel
- Viewing window: Polycarbonate

Surface finish:

- Enclosure and door: Dyed plastic with no after-treatment
- Mounting plate: Zinc-plated

Colour:

- Similar to RAL 7035

Protection Class:

- II at 1000 V AC

Protection category IP to IEC 60 529:

- IP 56

Protection category NEMA:

- NEMA 4X

Supply includes:

- Enclosure with hinged door with viewing window, of all-round solid construction, 3 mm double-bit lock
- Door hinged on the right, may be swapped to the left
- Mounting plate
- Twin seal on the top and bottom edges of the door as integral rain protection strip

Please note the product-specific scope of supply.


Note:

- Interior installation screws are required to secure components inside the enclosure
- Components such as punched sections with mounting flanges may be attached on a 25 mm pitch pattern using the universal bracket

Approvals:

- UL
- cUL

Further approvals can be found on the Internet

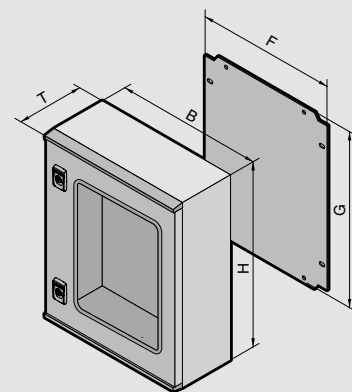

AX Plastic with viewing window

Model No. Standard	Width mm	Height mm	Depth mm	Design
1448000	400	400	200	with viewing window
1449000	400	600	200	with viewing window
1454000	500	500	300	with viewing window
1467000	600	600	200	with viewing window
1469000	600	800	300	with viewing window
1479000	800	1,000	300	with viewing window

Accessories

Model No. Standard	Description	Suitable for Width	Suitable for Height	To Fit Enclosure Type
1485744	Inner Door	400	400	AX plastic
1485766	Inner Door	600	600	AX plastic
1485768	Inner Door	600	800	AX plastic

Model No.	Description	Packs Of
1485400	Wallmount Bracket	4
2584100	Pole clamp	2
1485100	Door stay	2

Model No.	Description	Packs Of
1485600	Mini Comfort Handle	1
1485200	Universal bracket	4
1485300	Pan head screw, self tapping	50